

Low Profile Sconce Box

NEW!



Non-metallic, installs in existing 1/2" or 5/8" walls with 4" hole saw.

FEATURES AND BENEFITS

- Time-saving solution to retrofit installations that have shallow wall cavities—or obstructions running behind the wallboard
- Includes NM cable connector and mounting wings for 1/2" or 5/8" drywall and installation screws for mounting wings
- 4" diameter box accommodates most sconce light canopies, completely hiding the box

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | DESCRIPTION/ CU. IN. / DIA. | UNIT PKG | STD PKG | DIM A | DIM B | DIM C | DIM D |
|----------------|--------------------------|-----------------------------------|----------|---------|-------|-------|-------|-------|
| FSC405R | 04094 | Non-metallic/ 5.0 cu. in./4" dia. | 1 | 10 | 4.760 | 3.760 | 3.500 | .500 |



Add suffix "GC" to Catalog # when ordering in Canada, for example FSC405RGC. Refer to chart on page R-25 for load ratings and number of single conductors.



PATENTED.

INCLUDES...

5.0 cu. in. Low Profile Sconce Box, NM cable connector, (2) mounting wings for 1/2" drywall, (2) mounting wings for 5/8" drywall, and (2) installation screws for 'wings'.

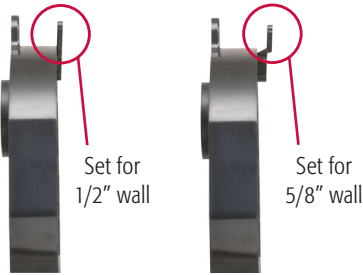

INSTALLATION INSTRUCTIONS

FOR EXISTING WALLS:

1

Determine sconce light location. Cut opening with 4" hole saw.

2

Pipe obstruction behind wall prevents the installation of a typical sconce box. Install mounting wing for 1/2 or 5/8" drywall. Pull cable...

3

...Inserting it into installed NM94 connector. Tilt box to insert it into the stud cavity.

4

Pull box towards you, into the 4" opening. Flip the retaining wings outward. Tighten screws to secure box to wallboard.

5

Finished box installation. Ready to install sconce light.

Scan For Video

