





LPCG50

WHITE SEALING  
RING MATCHES  
PRODUCT

LPCG757



LPCG50W

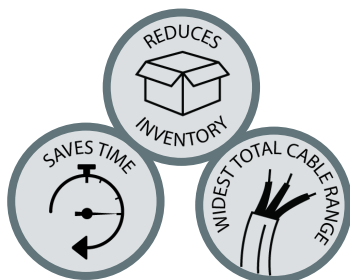

## Non-Metallic Low Profile Strain Relief Cord Connectors

Non-Metallic. Liquid tight. Oil tight. Furnished with sealing ring and locknut.

Arlington's Low Profile Cord Connector has a unique grommet with gripping fingers. These connectors have the largest cord range in the industry, so there are fewer items to stock. A liquid tight seal and superior pullout resistance is accomplished by just tightening the nut. A sealing ring is furnished to assure a liquid tight seal when installing in non-threaded openings.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503*†	50350	1/2	.100 - .360	25	100	1.792	.595	.978
LPCG50*	80086	1/2	.200 - .485	25	100	1.792	.595	.978
LPCG507†	50354	1/2	.385 - .600	25	100	2.250	.595	1.230
LPCG753*†	50760	3/4	.100 - .360	10	50	1.963	.595	.978
LPCG754†	50762	3/4	.200 - .485	10	50	1.963	.595	.978
LPCG757†	36100	3/4	Grommet A - .385 to .600 Grommet B - .600 to .750	10	50	2.250	.595	1.230




E105706



LR49636

†MADE IN USA.

\*UL not applicable for cords under .200" diameter, wire strength will not meet UL 35 lb test requirements for the fitting. When ordering black, add suffix "BL" to catalog number. When ordering white, add suffix "W" to catalog number.

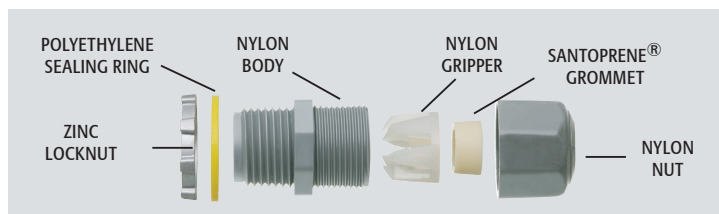

Scan for Video

