

Arlington Industries, Inc.

1 Stauffer Ind. Park - Scranton, Pa. 18517
800-233-4717 Fax: 570-562-0646
www.aifittings.com - E-MAIL: sales@aifittings.com
Manufacturers of Quality Electrical Products





Contents:



- (1) FR405F Box
- (1) 1/4" Extension Ring
- (1) 3/4" Extension Ring
- (2) #8 x 1/2" Long Screws
- (2) #8 x 1-1/4" Long Screws
- (1) NM94 Connector
- (1) NM900 Plug

FR405F Pan Box



Accommodates 5/8", 7/8" & 1-3/8" Cladding

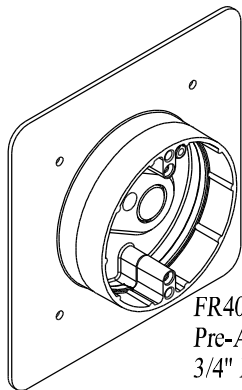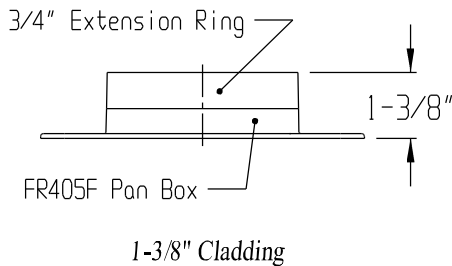

**Note: FR405F is
Pre-Assembled
For 1-3/8" Cladding**

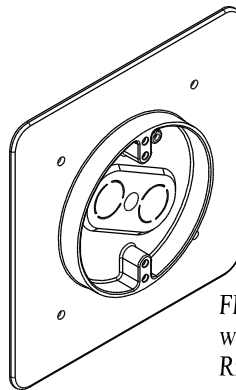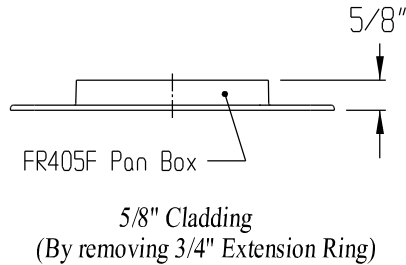

For 5/8" Cladding

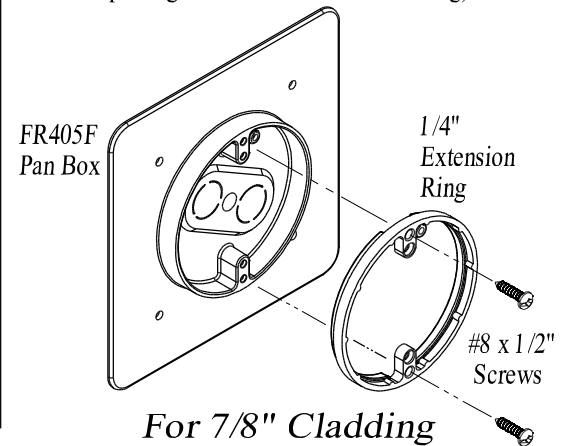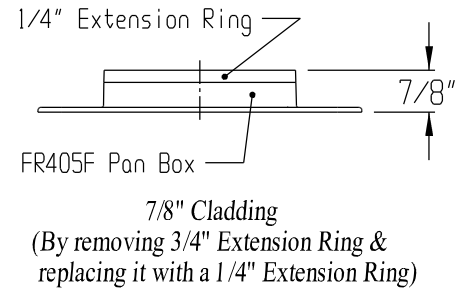

For 7/8" Cladding



(2) #8 X 1/2" Long Screw



(2) #8 X 1-1/4" Long Screw



(1) NM94 Connector



(1) NM900 Plug

If you have any questions or if parts are missing from your FR405F, Please call our Customer Service Department at 1-800-233-4717.
Do not call or return this product to your local store or distributor.

Installation Instructions:

1. Determine cladding thickness. FR405F Box is pre-assembled for 1-3/8" cladding. If 5/8" or 7/8" cladding is to be used, remove the 3/4" thick Extension Ring. This provides for 5/8" cladding. For 7/8" cladding, attach 1/4" Extension Ring. (See illustration).
2. Drill hole for wire.
3. Install NM94 Connector in opening to be used in Box.
4. Install NM900 Plug in the other opening (if needed).
5. Pull wire thru NM94 Connector.
6. Install Box to substrate (Screws not provided).
7. Apply self-adhesive flashing tape (not provided) to seal the bottom, left & right sides, then the top of FR405F flange.

Wire installation per NEC, State and Local Codes.

The manufacturer warrants this product for material and workmanship only, and shall not be liable for any special incidents or consequential damages or for damages or loss caused by improper use or installation.