
Steel Pan Box for Fans & Fixtures

Joist Mount – with Threaded Openings



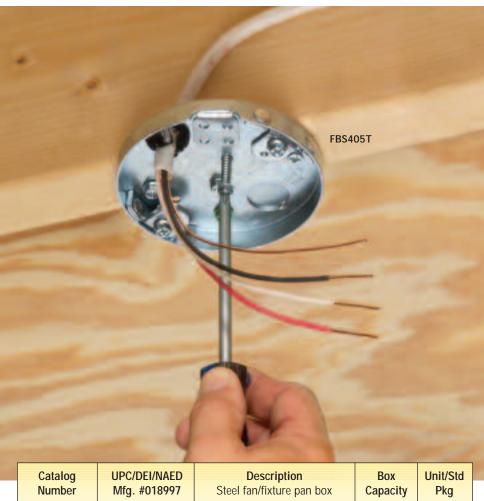

For 1/2" or 5/8" drywall

For 5/8" drywall

FBS405T

FBS407T

40500

40700

Arlington

1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com

Patents pending

25

25

6.0 cu. in.

8.0 cu. in.

Arlington's new steel pan boxes for fans or fixtures, mount directly to a joist for installation security you can count on.

Threaded openings

In these boxes, the fan/fixture bracket attaches to the box through threaded openings with #10 screws (supplied).


For added convenience and timesavings, installation screws ship captive, so there are no parts to lose! Plus, the NM cable connector is already installed.

FBS405T for 1/2" or 5/8" ceilings, FBS407T for 5/8" ceilings

- Competitively priced
- Strong, secure installation directly to the joist
- Plated steel finish
- UL rated: 70 lb fan, 200 lb fixture CSA rated: 50 lb fan or fixture
- Include installation screws. installed NM cable connector, mud cover, aditional KOs and four bracket installation screws (screwed in place until removed/used by installer).

Steel Pan Box for Fans & Fixtures


Super-secure Joist Mount Installation • Plated Steel




 Use bracket installation screws to position box on joist. (underside of box, against joist shown above)



2 Remove mud cover. Remove four box installation screws (shipped in place). Use these screws to install box to joist through pre-drilled holes.




3 Pull NM cable through installed NM cable connector – or where metal raceway is required by code, remove NM cable connector and install appropriate fitting.





1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com FBS405T 0108/50M



4 Replace the mud cover. Remove the #10 screws indicated above...



5 ...and use them to install the fan bracket.

Note: If installing a light fixture, use the #8-32 screw holes in the mounting tab for the fixture installation (#8 screws not supplied).

Distributed by		

COLO Arlipat action Arling