

Zinc-Plated Steel Low-Profile Strain Relief Cord Connectors

Zinc-plated steel. Liquid-tight. Oil-tight. Furnished with sealing ring and locknut.

Arlington's Low Profile Cord Connector has a unique grommet with gripping fingers. These connectors have the largest cord range in the industry, so there are fewer items to stock. A liquid-tight seal and superior pullout resistance is accomplished by just tightening the nut. A sealing ring is furnished to assure a liquid-tight seal when installing in non-threaded openings.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503S*	12788	1/2	.100 - .360	25	100	1.824	.578	1.038
LPCG50S	12787	1/2	.200 - .485	25	100	1.824	.578	1.038
LPCG507S	12789	1/2	.385 - .600	25	100	2.248	.592	1.375
LPCG753S*	12790	3/4	.100 - .360	10	50	1.824	.800	1.375
LPCG754S	12791	3/4	.200 - .485	10	50	1.824	.800	1.375
LPCG757S	12792	3/4	Grommet A - .385 to .600 Grommet B - .600 to .750	10	50	2.304	.765	1.300





*UL not applicable for cords under .200" diameter. Wire strength will not meet UL 35 lb test requirements for the fitting.


▲Includes UF grommet 14/2 to 12/2 and cord grommet .100 to .300. Bags not available in black. When ordering black, add suffix "BL" to catalog number. When ordering white, add suffix "W" to catalog number.

PATENTED.


Scan for Video

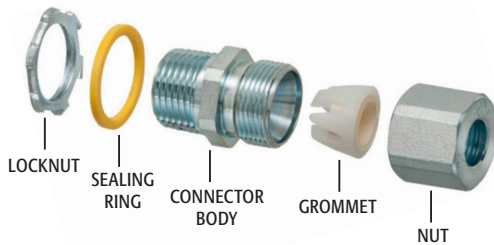

LPCG503S



LPCG507S



LPCG757S