

NEW
more on
reverse

Non-metallic HOLE SAW BOX™ for Old Work

Saves Time • Installs Devices with a Standard Hole Saw!



**Super Fast,
Secure Installation!**

Saw Teeth on both sides of the box cut a path through the drywall for the device screws which hold the device firmly in place

FSC3227R

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Unit/Std Pkg
FSC3227R	12525	Non-metallic, 3-1/4" diameter sconce/device box for existing construction	25



Patent pending

Installing an 'old work' box? Arlington's new non-metallic device/sconce box **SAVES TIME!** It comes ready to use and it's easy to install with a 3-1/4" standard hole saw!

You'll get a super-secure installation too. As you push the box into the opening, its saw teeth cut a path through the drywall for the device screws. They hold the device securely in place.

After installing the device, complete the job with a maxi-plate – required to fully cover the hole in the drywall.

- For existing construction
- Listed for wall mount devices and light duty fixtures up to 3 lbs max. And for installations on ceilings, up to 6 lbs.
- Large capacity: 17.9 cu. inches
- Ships with an installed NM cable connector


Quick, super-easy installation with a hole saw!



Arlington
1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com




Non-metallic HOLE SAW BOX™ for Old Work

Super-size Capacity • 17.9 cubic inches

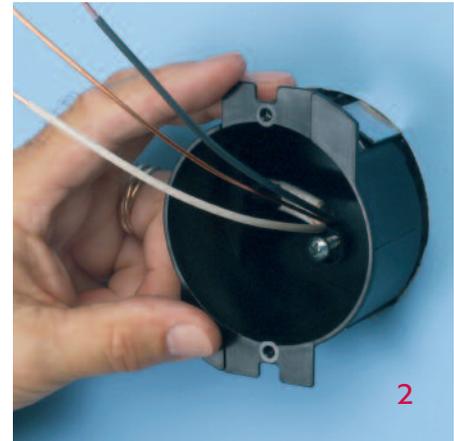

Quick, super-easy installation with a hole saw!

- 1 Cut hole with a 3-1/4" standard hole saw and pull wire.
- 2 Push wire through the installed NM cable connector. Push box through drywall. As the box is pushed, built-in teeth create a path for the device screws.
- 3 Tighten device screws inside the box.
- 4 Install device (GFCI shown).
- 5 Completed device installation.
- 6 Install maxi-size cover plate (required to fully cover hole in the drywall).

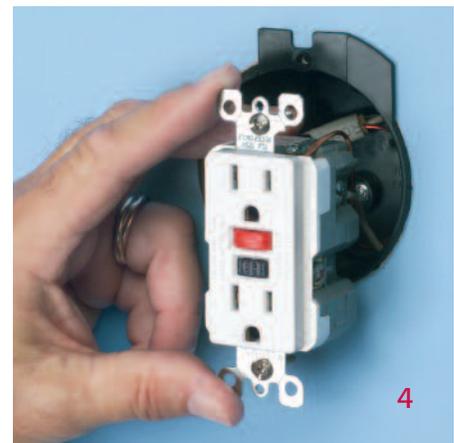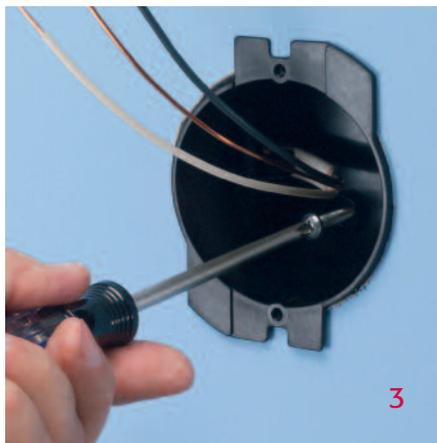

Arlington

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com

Ships with installed NM cable connector.

Distributed by