

## SNAP<sup>2</sup>IT<sup>®</sup> Connectors with Insulated Throat

Zinc die-cast. For AC • MCI-A • HCF steel and aluminum cable • Flexible metal conduit steel and aluminum (regular and reduced wall) • MCI cable • Continuous corrugated aluminum • ACG90 • AC90 • MC-PCS.

SNAP-TITE<sup>®</sup> and SNAP2IT<sup>®</sup> products have been tested and listed by UL in accordance with UL's ground fault requirements. For additional information see page 8.

### FEATURES AND BENEFITS

- Installs as fast and costs the same as our other Snap2It fittings, but cable insertion is even easier!
- Simply snap the cable into the fitting and snap it into the box...no tools needed! The screw only holds the clip in place
- Widest cable ranges—accommodates cable from 14/2 to 3/3
- Super-secure—the angled, two-prong clip locks down on MC cable so there's no chance of pullout
- Cable is removable. Simply loosen the screw on top. (See page E-1 for ring removal instructions.)

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	CABLE RANGE
3810AST	00385	3/8	1/2	50	500	1.473	1.179	.840	.316	.370 - .490
4010AST†	40355	3/8	1/2	50	500	1.473	1.244	.840	.404	.405 - .612
5010AST†	00517	1/2	1/2	25	250	2.210	1.514	.840	.614	.560 - .850
7510AST	55090	3/4	3/4	25	25	2.496	1.709	1.058	.828	.895 - 1.035



Provided with red tinted inside clip so you can tell the difference between a 3810AST & 4010AST.

†Also for new MC-PCS cable.


CSA Listed with anti-short bushing ONLY.

Refer to chart on page E-27 for list of cable types.

See page E-30 and E-31 for MCI-A cable ranges.

Concrete tight when taped.

**PATENTED.**

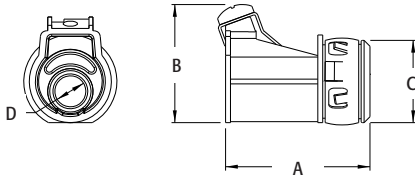

For the **WIDEST TOTAL CABLE RANGES**



3810AST



4010AST




5010AST



7510AST

### EASY CABLE INSERTION—TIGHT, SECURE HOLD!



TOP VIEW  
Clip holds cable firmly in place



BACK VIEW  
Note angled, two-prong clip

**LISTED SNAP<sup>2</sup>IT<sup>®</sup> CONNECTORS FOR NEW MC-PCS CABLE**  
Lighting & Low Voltage circuits in the same cable