

Low Profile In Box® with Metal Box for Flat Surface Retrofit Construction

Recessed, metallic electrical box with non-metallic, extra duty weatherproof in use cover for flat surfaces in existing construction. Accepts most single-gang wiring devices and uses standard indoor wall plates or a GFCI cover plate. Non-metallic portion and covers are UV rated plastic for long outdoor life. Compatible with DBVC and DBVW extra duty replacement covers on K-17.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	ORIENTATION/COVER COLOR	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	DIM E
DSBVR1C	09654	Vertical/Clear	1	4	7.196	4.937	5.129	1.283	3.846
DSBVR1W	09655	Vertical/White	1	4	7.196	4.937	5.129	1.283	3.846
DSBHR1C	09656	Horizontal/Clear	1	4	4.937	7.196	5.129	1.283	3.846
DSBHR1W	09657	Horizontal/White	1	4	4.937	7.196	5.129	1.283	3.846

 **PATENTED.**
E48106 LR49636
ADDITIONAL PATENTS PENDING.



Note: Meets NEC section 406.9 (B) for the protection of exterior outlets where an extra duty weatherproof in use cover is required for 15 or 20 AMP receptacles installed outdoors.

FEATURES AND BENEFITS

- In Box® replaces the installation of an electrical box and bubble cover assembly
- Installs in the wall, so less of it shows outside
- No gaskets required
- Use the retrofit In Box® on plywood, T-111, and other flat surfaces
- Grounding wire provided
- For use with metal raceway systems
- Install option: Cover is removable for easier device installation
- White, non-metallic portion and white cover are textured/paintable



Bug Plugs ship installed in all In BOX® styles to seal unused cord hole openings.

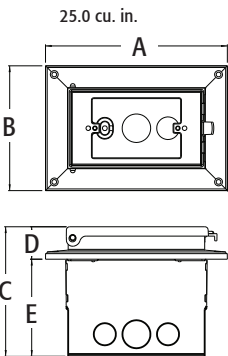

Scan For Video



IN BOX® FOR RETROFIT, FLAT SURFACES INCLUDES

Metallic box with non-metallic, extra duty weatherproof in use cover; installed bug plugs; (1) standard duplex and (1) standard GFCI face plate; (1) set installation screws; and (1) roll of caulk.