

## Plastic Recessed TV Box™ with Angled Openings



TVB712



TVB713

Scan For Video



For new or existing construction. Non-metallic, recessed combo boxes for power and low voltage for class 2 wiring of satellite or cable TV, speakers, etc.


### FEATURES AND BENEFITS

- Non-metallic, paintable trim plate
- For new or old work
  - Positioning tabs for 1/2" wall thickness assure accurate placement on stud in new construction
  - For retrofit, use enclosure (without the trim plate) as a template for the wall opening
- Optional cover available for TVB713

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | DESCRIPTION  | UNIT PKG | STD PKG | DIM A  | DIM B | DIM C |
|----------------|--------------------------|--|----------|---------|--------|-------|-------|
| TVB712         | 09712                    | Power and/or low voltage   | 1        | 1       | 10.210 | 7.561 | 4.094 |
| TVB713         | 09713                    | Power and multiple low voltage openings w/ interchangeable tray. | 1        | 1       | 17.000 | 7.000 | 4.094 |
| TVB613C        | 09631                    | 4-Gang white cover (fits TVB713)                                 | 5        | 5       | 17.000 | 7.000 | .127  |

Add suffix "GC" to Catalog # when ordering in Canada to include grounding clip, for example TVB713GC.

**PATENTED.**

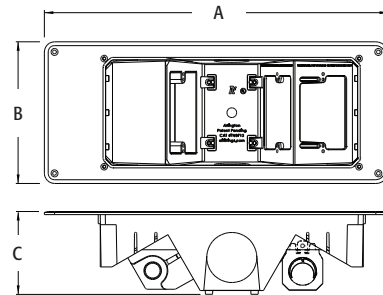

### INSTALLATION INSTRUCTIONS

#### Retrofit



Cut a hole using enclosure next to stud. Use box without trim plate, as a template. Pull wires and insert box in hole.



Assemble trim plate. (Retrofit must also use a minimum of (2) #6 x 1-5/8" wood screws in adjacent stud.)

#### New Work



Attach box to stud through slotted holes. Use minimum of (2) #6 x 1-5/8" wood screws. Pull wires.



Installed TVB712.



Installed TVB713.