


## TV Bridge™ II Kits

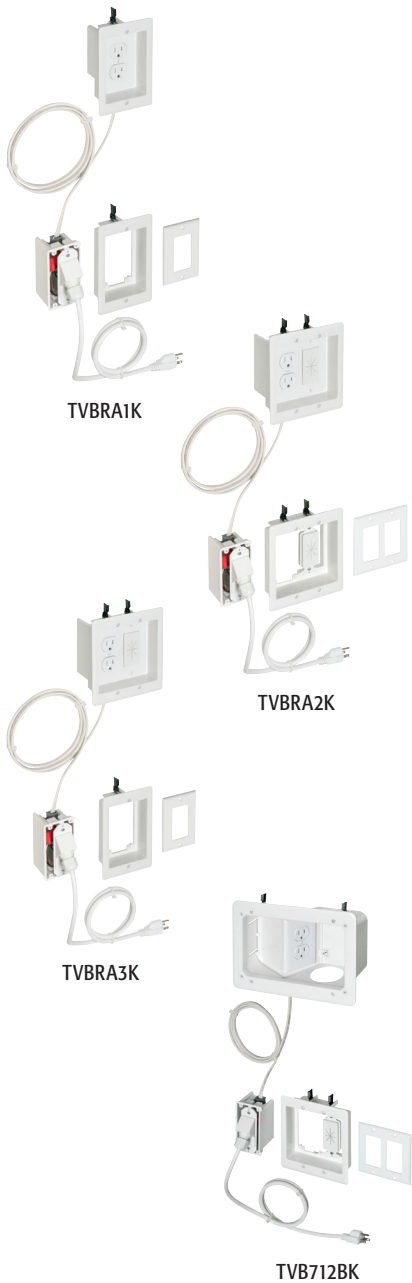

Non-metallic pre-wired, pre-assembled box kits for flat screen TV installations.

### FEATURES AND BENEFITS

- Pre-wired for easy install
- Mounting wing screws hold the boxes secure against the wall
- Plugs and connections stay inside the recessed boxes so TV mounts flush against the wall
- No mess! Wires stay hidden behind the wall

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG
TVBRA1K	24180	w/ Single-gang boxes	1	1
TVBRA2K	24181	w/ 2-Gang power/low voltage box	1	1
TVBRA3K	24195	2-Gang power/low voltage upper box, single gang (lower)	1	1
TVB712BK	12781	Single-gang angled power upper box, 2-gang power/low voltage lower box	1	1

Add suffix "GC" to Catalog # when ordering in Canada to include grounding clip, for example TVBRA1KGC.  
**PATENTED.**



CATALOG NUMBER	KIT CONTENTS
TVBRA1K	Single-gang recessed box containing an outlet connected to 7 ft. of NM cable. Second single gang recessed box connected to the NM cable. Includes pre-wired 4 ft. 110V outlet plug, trim, and face plate.
TVBRA2K	2-Gang recessed box containing low-voltage & power outlet connected to 7 ft. of NM cable. Second 2-gang recessed box containing low-voltage & power connected to the NM cable. Includes pre-wired 4 ft. 110V outlet plug, trim plate, and face plate.
TVBRA3K	2-Gang recessed box containing low-voltage & power outlet connected to 7 ft. of NM cable. Second single gang recessed box connected to the NM cable. Includes pre-wired 4 ft. 110V outlet plug, trim, and face plate.
TVB712BK	Single-gang recessed box containing an angled power outlet connected to 7 ft. of NM cable. Second 2-gang recessed box containing low-voltage & power connected to the NM cable. Includes a pre-wired 4 ft. 110V outlet plug, trim plate, and face plate.

Scan For Video



### INSTALLATION INSTRUCTIONS



Cut Top hole in wall for the TV.  
Cut Lower hole directly below the top hole, close to existing outlet.  
Drop the pre-wired device box assembly and cable through the top hole. Insert box and tighten wings.



Pull pre-wired device assembly through the bottom hole.



Attach device box to trim plate with screws provided. Secure trim plate to wall with mounting wing screws. Install CED130 in 2-Gang boxes. Pull cables.

