

Nail On, Flanged Vapor Box for Devices

Versatile non-conductive outlet box for new construction. For single 1/2" or 5/8" drywall.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION/ CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FN101FL	09814	Single-gang Nail on/22.8	25	25	7.664	5.000	3.594	2.277
FN102FL	54222	2-Gang Nail on/40.5	10	10	7.665	6.811	3.594	4.089



PATENTED.
MADE IN USA.


Add suffix "GC" to Catalog # when ordering from Canada to include grounding clip. Refer to L-8, Q-4, Q-11, Q-13, R-2, and R-3 for additional Vapor Boxes.

FEATURES AND BENEFITS


- Built in gasketed flange has ultra thin alignment tabs so there's NO DRYWALL BULGE
- For added convenience nails ship captive and the installed NM connectors and flange have the gasket material attached, no assembly required!
- Gaskets form a protective barrier that prevents air infiltration inside to meet International Energy Conservation Codes (IECC) and other codes where required
- Fast and easy to install
- UL Listed, UV Rated
- 2 hour fire rating

INCLUDES


Non-metallic box with installed NM cable connector and gaskets, (2) captive nails for box installation and (1) plug for unused knockouts.

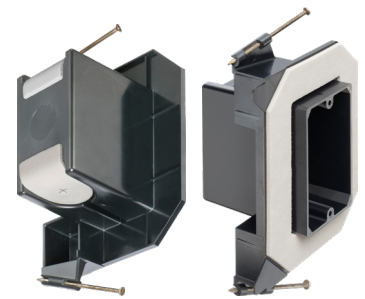

FN101FL

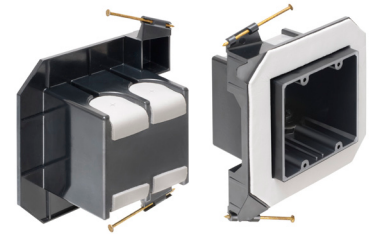

FN102FL

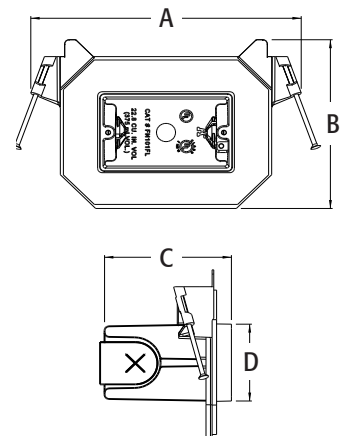

INSTALLATION



Position Vapor Box, attach to stud with captive nails. Pull cable through installed cable connector.

