




SL24




SL18



SLB101

SLB102




SL1B18


SL18BKT



SL2B18




SL2B24



SL24F




SL18F

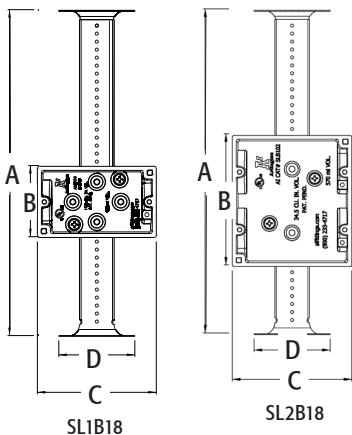


SL1B18


SL2B18

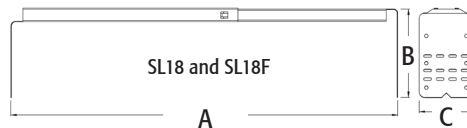


SL18 and SL18F

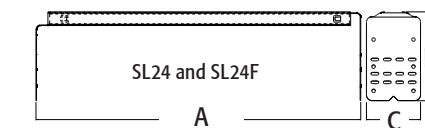


SL24 and SL24F




SLB101




SLB102

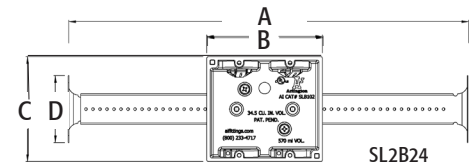

SL2B24

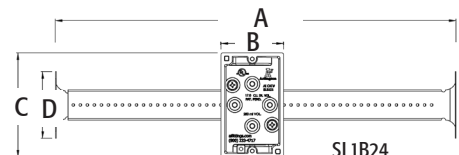

SL1B24

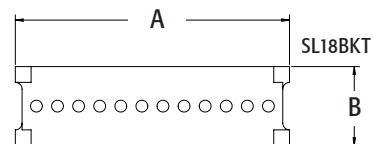

SL18BKT

SliderBar™ Boxes and SliderBar™ Box Kits

Fits between studs spaced 12" to 18" apart, and allows you to position one or multiple boxes where you need them in the stud cavity.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	UNIT CTN	STD CTN	DIM A	DIM B	DIM C	DIM D
SL18	00929	25	25	10.5" Min 17" Max	3.846	2.375	---
SL18BKT†	15901	50	50	3.250	0.937	---	---
SL18F†	15902	25	25	10.5" Min 17" Max	4.208	2.375	---
SLB101‡	00930	25	25	3.610	3.000	.715	---
SLB102‡	00931	10	10	3.620	3.000	3.725	---
SL1B18‡	00932	10	10	10.188	2.225	3.715	2.375
SL2B18‡	00933	10	10	10.188	4.125	3.725	2.375
SL1B24*‡	00921	10	10	14.250	4.125	3.725	2.375
SL2B24*‡	00922	10	10	14.250	2.225	3.715	2.375
SL24*	00920	25	25	15" Min 24" Max	3.900	2.375	---
SL24F*†	15903	25	25	14.25" Min 25.5" Max	4.208	2.375	---



E105706 E105706

†Flat Brackets. ‡Add suffix "GC" to Catalog # when ordering in Canada to include grounding clip, for example SLB101GC.

FEATURES AND BENEFITS

- Bending guides on bracket ends assure proper positioning on studs.
- Sliderbar and boxes sold separately
- SLIDERBAR/Box Kits include a single or two gang non-metallic box. Non-metallic boxes rated for NM Cable, NMB-PCS and NMD90 in Canada.
- When using a metal box SLIDERBAR is rated for non-metallic as well as MC, AC and FMC cable. Metal boxes not included.

*KIT INCLUDES

Kits include slider bar, box, screws for box to bar attachment, slider clip