

**Fan & Fixture Mounting Boxes**

Locator posts for positioning of bracket installation screws



**EACH FAN/FIXTURE BOX INCLUDES...**

A ready-to-tighten center screw, installed NM cable connector, mud cover, multiple KOs, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

Our lowest cost L-shaped fan/fixture boxes mount securely to single or double joists with a shipped-in-place center screw.


**FEATURES AND BENEFITS**

- No loose parts to misplace—totally self-contained!
- Locator posts assure proper positioning of fan/fixture bracket
- Competitively priced
- Fan/fixture installation screws are parked...ready for easy fan/fixture bracket installation!
- UL rated: 70 lb fan, 200 lb fixture; CSA rated: 50 lb fan/fixture
- 2-Hour Fire Rating

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FB442	72194	For 1/2" or 5/8" drywall 13.4 cu. in.	25	25	4.236	3.773	4.250	3.273
FB443	72197	For 1/2" or 5/8" drywall 18.3 cu. in.	25	25	4.236	5.071	4.250	4.571

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided. Refer to chart on page R-24 for load ratings and number of single conductors.

**PATENTED.**

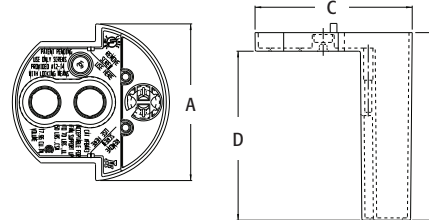

**INSTALLATION INSTRUCTIONS**



**1** Position box alongside joist. Tighten center screw, mounting box to joist.



**2** Position mounting bracket over locator posts to assure proper position. Pull wires through KO.



**3** Remove captive bracket installation screws. Use them to mount fan/fixture bracket. (Installation of drywall not shown.)