

Non-Metallic Rainbox™

Rain-tight, labor-saving solution to installing a fan or fixture exposed to the elements, inside or outside.

FEATURES AND BENEFITS

- Oversized medallion accommodates canopies up to 7" in diameter
- Available in white or bronze
- UL/CSA Listed, rain-tight assembly
- NEC code compliant. Completely sealed against water, dirt, and pests—no exposed wiring



FBC4225W



FBC4225BR

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION/ CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FBC4225BR	09677	Bronze, Non-metallic 21.0 Cu. In. Box	1	5	7.500	2.718	5.390	2.059
FBC4225W	09679	White, Non-metallic 21.0 Cu. In. Box	1	5	7.500	2.718	5.390	2.059



Refer to chart on page R-22 for load ratings and number of single conductors.

PATENT PENDING.



FBC4225W & FBC4225BR INCLUDES...

21.8 cu. in. RAINBOX™, medallion, (2) 1/2" to 3/4" NPT reducing bushings, (4) plugs, (2) #8 x 1-1/4" screws for medallion, and (2) #12 x 4" screws for fan/fixture bracket.

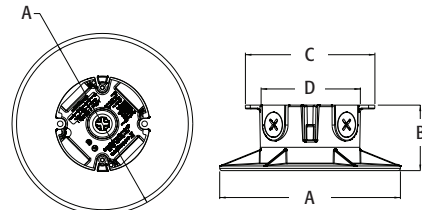

INSTALLATION INSTRUCTIONS



1 Install fitting with conduit. Seal unused openings with supplied plugs. Mount box to structural member.



2 Pull wire (not included).



3 Attach medallion to box with supplied #8 x 1-1/4" screws.



4 Attach fan/fixture bracket to structural member using supplied screws (#12 x 4"). Connect wires and install fan/fixture per manufacturer's instructions.

