

Steel Adjustable Bracket with Plastic Box



Low-cost, economical steel fan/fixture bracket with plastic box delivers super-secure, versatile on-center mounting between joists 16" to 24".

FEATURES AND BENEFITS

- Fan/fixture installation screws ship captive
- Bracket ends adjust for flush installation on ceilings up to 1-1/4" thick
- UL rating:
 - @ 24" on-center: 70 lb fan, 90 lb. fixture
 - @ 16" on-center: 70 lb fan; 150 lb fixture
- CSA rating: 50 lb fan or fixture
- 23.0 cubic inch plastic box
- 2-Hour Fire Rating

EACH FAN/FIXTURE BOX INCLUDES...


Installed NM cable connector, mud cover, multiple KOs, four installation screws parked-in-place (ready for installer), and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A
FBR423	52310	Plastic box with adjustable steel bracket/23 cu. in.	1	10	2.548

Refer to chart on page R-24 for load ratings and number of single conductors.

PATENTED.

NEW
**LOWER COST
LARGER BOX**
than our
FBR5415

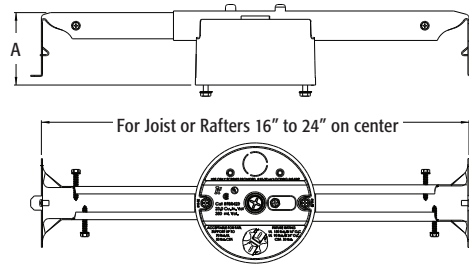

INSTALLATION INSTRUCTIONS



Bracket mounts securely to joists.



Loosen center screw to position box on bracket.



Bracket ends are pre-set for a 1/2" ceiling. For other ceiling depths, bend the bracket ends along the appropriate score line.

Scan For Video

