


NEW!
more on
reverse

STEEL T-Box for Suspended Ceiling Grids

For use with Metal Raceway in Commercial Work • UL Listed

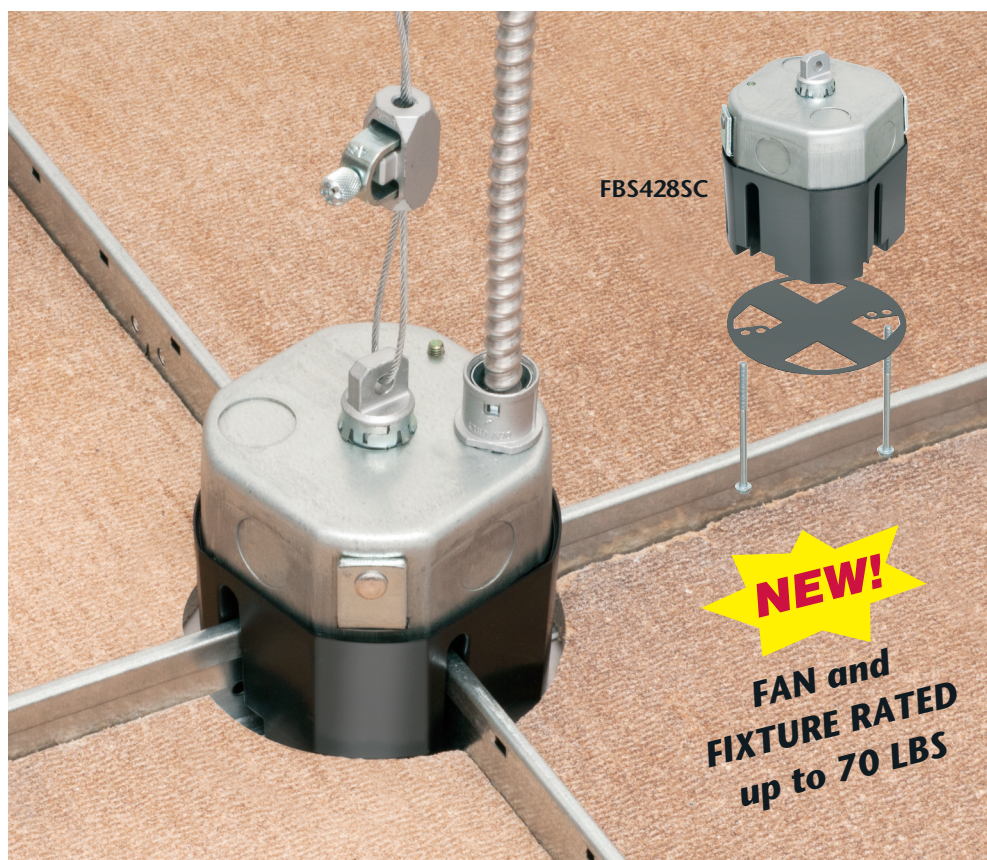

POSITION BOX on grid at the CROSS or on the STRAIGHTAWAY



FBS428SC saves 50%
over our FBR5420SC




Arlington's economical, UL Listed STEEL T-Box is the cost-effective way to mount a variety of items on a suspended ceiling grid.

You can position T-Box on the ceiling grid at the T-rail cross *or* on a straightaway, so *YOU* decide where to position the equipment.

Use T-Box for mounting fans, fixtures, smoke and carbon monoxide detectors, security cameras, exit signs and emergency lighting, *up to 70 lbs.*

To install, just cut around the ceiling tile and lower the box onto the ceiling grid where it fits securely in place.

For use on premium/reveal edge ceiling tiles, adjust the box height by removing the **tabs** with pliers. Easy!



- 30.5 cu inch box, with installed NM cable connector
- UL Listed for Fans/Fixtures up to 70 lbs
- Meets 2017 NEC, section 314.27 for fan and fixture boxes

Patents
pending




Arlington®

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

STEEL T-Box for Suspended Ceiling Grids

UL Listed • For use with Metal Raceway

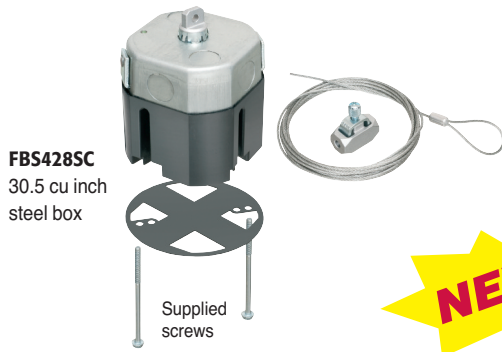

CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	DESCRIPTION	UNIT PKG	STD PKG
FBS428SC	12782	STEEL T-Box for Fans/Fixtures up to 70 lbs Includes Wire Grabber™ with Braided Drop Wire Support Kit, (2) #10-32 x 4" screws, grid cover	1	10/carton




INSTALLATION INSTRUCTIONS

- 1** Locate position of item to install.
A = straight on T-bar rail.
B = Intersection of T-bar rails (cross).

- 2** Cut out around ceiling tile.
A = for straight.
B = for cross.


- 3** Drop box onto
grid from overhead.
*Remove tabs as necessary to
adjust ceiling tile height.*

- 4** Install fan, fixture (or other item)
per manufacturer's instructions.
NOTE Install fan/fixture bracket
with supplied screws.



Reinstall ceiling tiles. Install conduit
with connector (not included).
Install Wire Grabber connector.
Attach drop wire to structural member.

FBS428SC



Arlington®

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

Distributed by