

NEW!  
1" Bearing Surface

# The HOOP® High Speed Cable Ring

Non-Metallic

Listed

Protects Cable Against Damage



FOR USE IN  
ENVIRONMENTAL  
AIR HANDLING  
SPACES

The HOOP® is easy to use and its smooth, non-metallic surface protects MC/AC and communications cable against damage – with no bending or kinking of cable.


It offers **versatile horizontal or vertical mounting**...ON a beam clamp, wood beam or threaded rod – or UNDER a beam clamp. Use it with threaded rod too.

The HOOP locks to hold cable securely in place. To add cable without bending or kinking, use a screwdriver to open the latch.

- For use with MC/AC and communications cable, *not to exceed load rating*
- Wider 1" bearing surface helps to reduce cable separation
- Costs less than bridle rings
- Available with or without built-in 1/4-20 screw
- Complies with EIA/TIA standards
- Listed for use in environmental air handling spaces per NEC code requirements
- cULus Listed



Patent pending

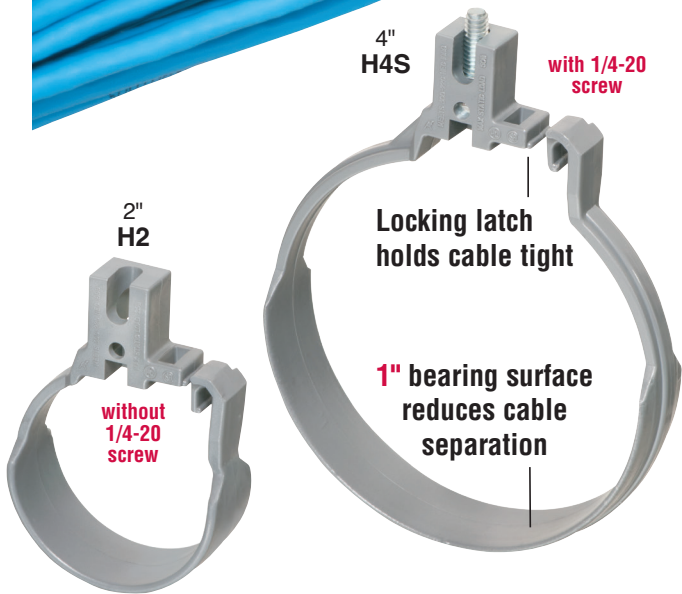

**Mounts Cable Horizontally or Vertically**  
**Available with or without 1/4-20 screw**

Catalog Number	UPC/DEI/NAED Mfg. #018997	The HOOP size High speed cable ring	Load Rating	Unit Pkg	Std Pkg
H2	50184	2"	25	100	100
H2S	50185	2" with 1/4-20 screw	25	100	100
H4	50186	4"	50	50	50
H4S	50187	4" with 1/4-20 screw	50	50	50



© 2024 Arlington Industries, Inc.



**Arlington®**

1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717 • Fax 570/562.0646**  
**www.aifittings.com**