

ONE-BOX™ Vapor Boxes for Devices

Versatile, non-conductive outlet box for new construction. Mounts directly to a wood.

FEATURES AND BENEFITS

- Fast and easy to install
- Mounts directly to a wood or steel stud for a super secure installation
- Flange forms a protective barrier against air infiltration
- *2-hour fire rating



F101F



FN102F



F103F




FN104FD



| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | DESCRIPTION/ CU. IN. | UNIT PKG | STD PKG | DIM A | DIM B | DIM C | DIM D |
|----------------|--------------------------|---|----------|---------|-------|-------|-------|-------|
| F101F | 12520 | Single Gang Screw-on / 22.0 | 25 | 25 | 5.990 | 4.500 | 3.510 | .500 |
| F102F | 06900 | Two-Gang Screw-on / 42.0 | 10 | 10 | 5.990 | 6.313 | 3.510 | .500 |
| F103F | 06901 | Three-Gang Screw-on / 59.0 | 10 | 10 | 5.990 | 8.125 | 3.510 | .500 |
| F104F | 06902 | Four-Gang Screw-on / 81.0 | 10 | 10 | 5.990 | 9.937 | 3.510 | .500 |
| FN101F | 15130 | Single Gang Nail-on / 23.0 | 20 | 20 | 5.990 | 4.500 | 3.594 | .500 |
| FN102F | 15132 | Two-Gang Nail-on / 43.5 | 10 | 10 | 5.990 | 6.312 | 3.594 | .500 |
| FN103F | 15134 | Three-Gang Nail-on / 63.5 | 10 | 10 | 5.990 | 8.124 | 3.594 | .500 |
| FN104F | 15136 | Four-Gang Nail-on / 85.3 | 10 | 10 | 5.990 | 9.936 | 3.594 | .500 |
| FN101FD* | 15131 | Single Gang Double Drywall Nail-on / 28.0 | 20 | 20 | 5.990 | 4.500 | 4.344 | 1.312 |
| FN102FD* | 15133 | Two-Gang Double Drywall Nail-on / 53.0 | 10 | 10 | 5.990 | 6.312 | 4.344 | 1.312 |
| FN103FD* | 15135 | Three-Gang Double Drywall Nail-on / 77.8 | 10 | 10 | 5.990 | 8.124 | 4.344 | 1.312 |
| FN104FD* | 15137 | Four-Gang Double Drywall Nail-on / 103.5 | 10 | 10 | 5.990 | 9.936 | 4.344 | 1.312 |


*For use with double drywall installation and has a two-hour fire rating. Add suffix "GC" to Catalog # when ordering in Canada to include grounding clip, for example F101FGC. Refer to R-1 and R-2 for additional Vapor Boxes.


PATENTED.

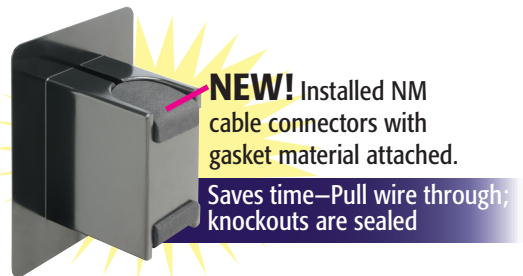

NEW! Installed NM cable connectors with gasket material attached.

Saves time—Pull wire through; knockouts are sealed

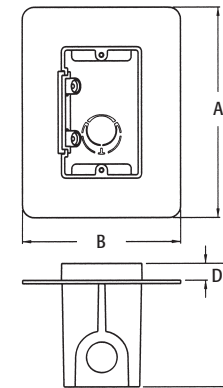



Multi-gang boxes work with the F102D divider.

FEATURES AND BENEFITS
Add divider for power/low-voltage applications.
See page Q-1 for ordering details.

F102D