




GPBK35BR

GPBK28B

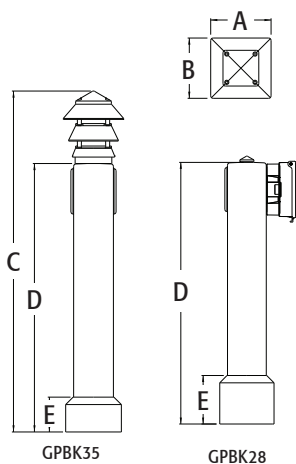

GPBK35

GPBK28

COLOR CHART

BRONZE

BLACK



28" and 35" Gard-N-Post™ Bollard Kits

Gard-N-Post with pagoda style light fixture included. Post is UV rated plastic for long outdoor life. Two non-chipping colors.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	COLOR/ DESCRIPTION	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	DIM E
GPBK28B	76090	Black W/ Cover	1	1	6.070	6.070	--	28.350	4.650
GPBK28BR	76093	Bronze W/ Cover	1	1	6.070	6.070	--	28.350	4.650
GPBK35B	77040	Black w/ Lamp	1	1	6.070	6.070	35.000	28.350	4.650
GPBK35BR	77041	Bronze W/ Lamp	1	1	6.070	6.070	35.000	28.350	4.650



E170558 LR49636

Add suffix "GC" to Catalog # when ordering in Canada, for example GPBK35BGC. CSA listed with grounding lug.

FEATURES AND BENEFITS

- Molded in color is permanent, unlike painted posts where lawn equipment chips the color off
- Low voltage separator provided for Power use on one side and Low Voltage on the other (phone, security, & cable TV)
- Openings on both sides of the post for back to back power
- Makes a very low cost bollard
- Includes Arlington's Large Louvered Pagoda Light Fixture
- Perfect for wood decks, boat docks, and concrete walkways
- (2) combination KO's for a UL Listed enclosure

GPBK35 KIT INCLUDES

Gard-N-Post & metal stabilizer, boot, pagoda light fixture & decorative spacer, (2) blank device plates with gaskets & screws, low voltage separator, and removable KO plate with screws.

GPBK28 KIT INCLUDES

Gard-N-Post & metal stabilizer, boot, IN-AND-OUT™ cover, (2) blank device plates with gaskets & screws, low voltage separator, and removable KO plate with screws.

INSTALLATION INSTRUCTIONS


- 1) Metal support post attaches easily to surface.
 - 2) The non-metallic GARD-N-POST slides over the support post.
- Both posts are held firmly in place with the supplied screws.
- 3) Place decorative curb over GARD-N-POST. Slide it down to cover the installation.
 - 4) Press fit spacer to base of lamp.
 - 5) Install pagoda light to post with locknut inside the top of the post. Wire fixture.

RECOMMENDED ANCHORS

(not included):

Concrete: (4) 3/8" x 2-1/2 Tapcons®

Cast In Place Concrete: (4) 3/8" anchor bolts

Wood Deck: (4) 3/8" bolts with nuts and washers

Tapcons® is a registered trademark of ITW Buildex.